

1 Histogram

Overview

Menu	Production control → Preparations for production → Graphic planning Production control → Preparations for production → Info shop floor planning
Tab	Planning details

Purpose

You call the *Histogram* in the graphic *Planning board* if you want to get an overview of the utilization of your workplaces or workplace groups over time.

Integration

The histogram is integrated into the [graphic planning board](#). The histogram displays the *actual assignment* of a workplace over time using the planned operations. To display the histogram of a group, the display is extended and also the operations not yet planned are used.

Requirements

You must select a [planning profile](#) in the graphic planning board and request data.

Editing functions

The histogram is displayed with the Gantt chart of the graphic planning board; it is always displayed below the Gantt.

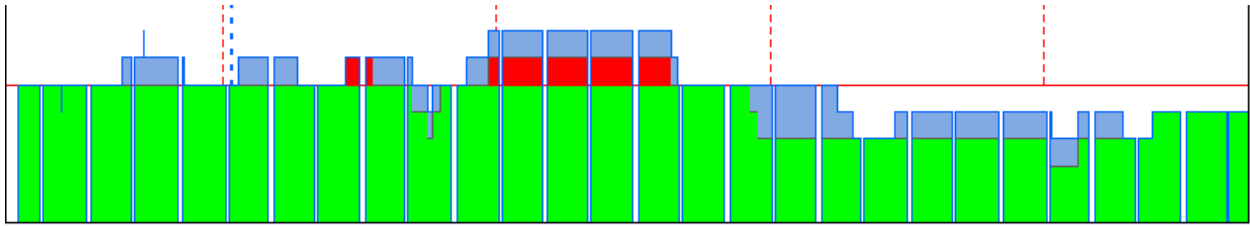
When you call the histogram, the values of the complete planning profile are displayed; this means: the values of all workplaces that are loaded in the graphic planning board. If you click a workplace in the Gantt workplace list, the workplace values are displayed. If you click a group, the values of all workplaces of the group are displayed.

If you replan operations in the graphic planning board (not possible with the *Info shop floor planning*), the histogram display is automatically updated.



For technical reasons, it is not possible to deselect a workplace or group. If you want to show the histogram for the complete planning profile, you must request the data a new time.

Note: If you select several workplaces or groups, only the workplace or group last selected is displayed in the histogram.

**Red line**

The red line shows the number of available resources (workplaces/machines).

Planned operations

As long as the available capacity is not exceeded, the green area shows the scheduled operations. If the capacity cannot meet the demand, the red line is exceeded and the utilization is displayed in red.

As long as the operations are not yet planned in detail for the workplaces, the required capacity is displayed in blue even if the available capacity cannot meet the demand.